

Dialight

LED TRAFFIC CABINET LIGHTING 2 LAMP AND 4 LAMP KITS



FEATURES / BENEFITS

- ▲ Low energy use, up to 65% reduction vs 30 watt fluorescent tube
- ▲ Full illumination at cold temperatures
- ▲ Cool White for improved visibility
- ▲ 70% lumen maintenance @50K hours
- ▲ Diffused lens for even illumination
- ▲ Mounts to top, sides or under shelf
- ▲ Modular “quick connect” system for ease of installation
- ▲ Cool to touch
- ▲ RoHS Compliant



SPECIFICATIONS

- ▲ Operating Temperature : -40°C to +74°C
- ▲ Includes Class 2 Power supply with 24 VDC output
- ▲ Cool White Light, 5000K
- ▲ 5.3 Watts per single module
- ▲ Module mounts with two #6 Machine screws
- ▲ Module is polarity protected
- ▲ Anodized aluminum base
- ▲ Hi Flux LEDs 280 Lumen minimum per single module
- ▲ 20 AWG PTFE cable – UL-E213967, 300 V. 80°C
- ▲ Module UL-2108 Approved

CL-2 LIGHTING ITEM PER KIT

| Kit Number | CL-2 with Diffused Lens | CL-2 Start 9.8' | CL-2 E2E | CL-2 End | CL-2 Extend 36" | 120 VAC Power Supply | |
|------------|-------------------------|-----------------|----------|----------|-----------------|----------------------|---------|
| | | | | | | 17 Watt | 34 Watt |
| CL2-CF-TC2 | 2 | 1 | 1 | 1 | 1 | 1 | - |
| CL2-CF-TC4 | 4 | 1 | 2 | 1 | 1 | - | 1 |



Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA


Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778

www.dialight.com



MDTSCL2X001_B

CL-2 KIT COMPONENTS

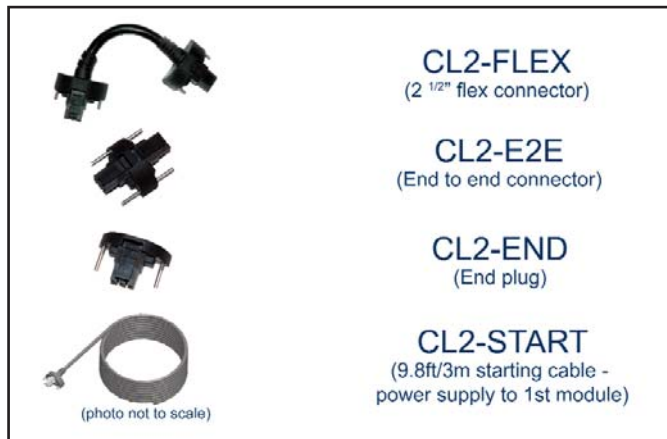

TYPICAL CABINET LIGHT INSTALLATION

