

Signal Backplates



EAGLE
Traffic Control Systems

Description

Traffic signal backplates are designed to properly shield a traffic signal from background obstructions. The backplate provides a dark silhouette that isolates the signal face from store lights, signs, sunlight and other environmental conditions that tend to reduce the brilliance of the light indications. A study found that backplating can cut the number of vehicle accident claims at intersections by nearly 15%.



Features

- Cored holes and stainless steel thread forming screws are provided in the die cast aluminum and polycarbonate traffic signals for quick, easy installation of backplates.
- Aluminum backplates are fabricated from .063" 5052-H32 aluminum and are standardly primed and painted flat black on both sides. Aluminum backplating provides the strongest strength-weight ratio and is very resistant to weather and corrosion in harsh environments.
- Poly backplates are fabricated from .125" high density polyethylene (HDPE) and are standardly dull black on one side and semi-gloss black on the other side. Polyethylene backplating is very resistant to impacts and abrasions. It will also keep its strength and shape in extreme temperatures and severe weather conditions.
- Available with 1", 2" and 3" wide reflective tape installed in center or flush with outside edge. If reflective tape is required, the backplates will be fabricated from ABS material.



Eagle Traffic Control Systems continues our 80+ year history of providing excellence in the ever evolving traffic industry. All of Eagle's products are developed with the highest standards of engineering and manufacturing. Eagle maintains a superior level of integrity in interactions with all of our business partners and customers. We also take tremendous pride in being model corporate citizens.

Eagle Traffic Control Systems is a division of:



Signal Backplates





EAGLE
Traffic Control Systems

Backplate Number Construction Code

Prefix	Width of Border	Signal Configuration			Plumbizer Mounting Allowance	Profile	Hanger Style	Width of Reflective Tape	Tape Location	Special Options j	Paint Option -**
		Number of 8" (203mm) Housings	Number of 12" (300mm) Housings	Face Arrangement*							
BPA = Alum - SG	5 = 5"	0	0	A - Z	N = None E = Eagle R = Ryall (Frey)	F = Flat L = Louver	00 = None 01 = Span Wire 02 = Astro Bracket 03 = Other	0 = None 1 = 1" 2 = 2" 3 = 3"	N = None E = Edge C = Center	0 = None 1 = Multi 2 = Tape 3 = Louver Size or direction 4 = Hardware 5 = Other 6 = Louver centered	-00 = Flat Black -12 = Yellow <i>(Contact Brown for other paint options)</i>
BPB = Poly - SG		1	1								
BPAP = Alum-SG W/Reflect Tape		2	2								
BPBR = Poly -SG W/Reflect Tape		3	3								
BPC = Alum - SA		4	4								
BPD = Poly - SA		5	5								
BPCR = Alum-SA W/Reflect Tape	8 = 8"	6	6								
BPDR = Poly -SA W/Reflect Tape											

* Use the lowest signal alpha designation for the wanted signal arrangement. Reference VFA [Vehicle Face Arrangement] Chart.

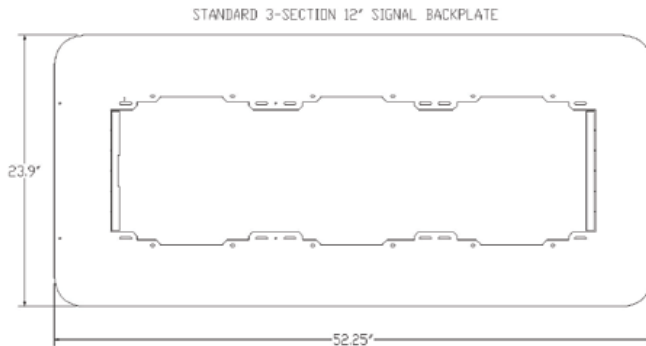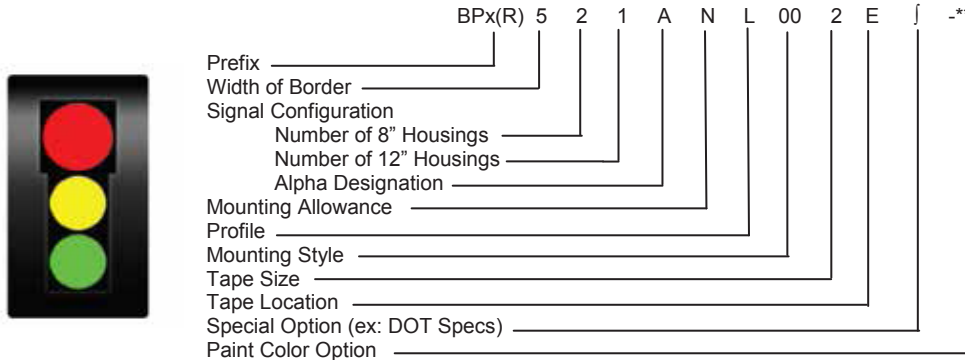

Eagle Traffic Control Systems is a division of:



736 Federal Street • Davenport, IA • 52803
8004 Cameron Road • Austin, TX • 78754