




COUNTDOWN PEDESTRIAN SIGNALS

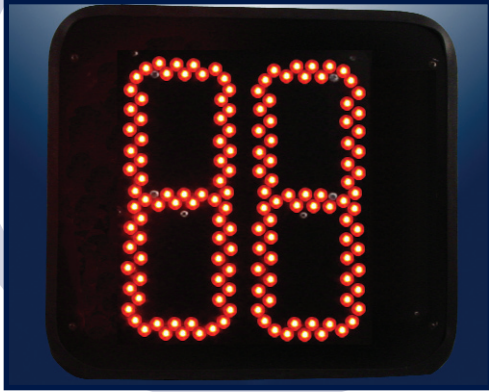

FEATURES / BENEFITS

- ▲ 2-Row 9" high countdown digits are MUTCD compliant for crosswalks over 100 ft.
- ▲ Full preemption compatibility... Reverts to it's previous timing immediately following a preemption call
- ▲ Unique memory feature allows countdown time to remain stored internally, even when power is removed for extended periods of time
- ▲ Up to 4 units can be connected in parallel without disturbing the monitoring of the Hand/Person
- ▲ Automatically adjusts to traffic controller interval changes
- ▲ 90% reduction in power vs. incandescent
- ▲ Long life; up to 10 times longer than incandescent
- ▲ Sealed moisture resistant enclosure
- ▲ Lens available to fit most pedestrian heads
- ▲ Lens has a textured surface to reduce glare*
- ▲ Easy to install into existing signal enclosure

* Round version has a clear lens.

SPECIFICATIONS

- ▲ Operating Voltage Range: 80VAC to 135VAC (120VAC nominal)
- ▲ Fuse and transient suppressor incorporated for line and load protection
- ▲ Power Factor > 0.9
- ▲ Total Harmonic Distortion < 20%
- ▲ Turn-on/Turn-off Time for Hand/Person = 75 msec max
- ▲ Operating Temperature Range: -40°C to +74°C
- ▲ Meets FCC Title 47, Subpart B, Section 15 Regulations for electrical noise
- ▲ Provided with quick connect terminals and spade adapters
- ▲ Written manufacturer's warranty available on request
- ▲ All products traceable by serial number
- ▲ LED Colors: Countdown Numerals - Portland Orange

TYPICAL OPERATING CHARACTERISTICS

Part Number	Housing Size (Inches)	SYMBOL	TYPICAL WATTAGE @ 25°C	CSA Approved
		Countdown	Countdown	
430-7773-001	12 x 12	2-Row	5	✓
430-5270-001	12" Round	2-Row	5	✓

Note: Dialight Countdown Timers for use in conjunction with the following Canadian Hand/Person Overlay Pedestrian Signals:
 430-6775-001 12" Round Pedestrian Signal
 430-6776-001 12" x 12" Pedestrian Signal
 See separate data sheet for complete specifications.

Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



CANADA